

GEOPHYS 242: Near Surface Geophysical Imaging

Class 1: Introduction

This course shall focus on the near-surface seismic imaging technologies, and the issues of near-surface corrections for seismic data processing. It starts with review of near-surface structures worldwide, seismic wave propagation in the near-surface areas, fundamentals in seismic statics calculations, and it is then going to cover the following subjects in details with theories and applications:

- 1) Refraction traveltime interpretation methods
- 2) Refraction delay-time solutions
- 3) First-arrival traveltime tomography
- 4) Early-arrival waveform tomography
- 5) Refraction traveltime and wavefield migration
- 6) Refraction wavefield interferometric migration
- 7) Near-surface dispersion-curve inversions
- 8) Joint seismic and gravity inversions
- 9) Wave-equation datuming and wavefield datuming
- 10) Velocity-independent datuming by interferometry
- 11) Velocity-independent datuming by Common-Focus Point (CFP)

During this course, we will also invite a few experts in the seismic industry to give presentations to our class through the Internet videoconference. With the help of instructor, each student is going to select a research project to work with during this semester. In the final week of this course, students are going to present the research results. Successful studies shall be encouraged to be published.

Today we are going to discuss about the following issues:

- Brief review of global Earth structures and seismology
- Near-surface geology and velocity structures
- Seismic wave propagation in the near-surface area
- Near-surface seismic statics corrections
- Review of seismic data processing workflow

Brief Review of Global Earth Velocity Structures and Seismology

Continental or Oceanic Crust – varies globally, Moho discontinuity

Mantle - upper-mantle discontinuities

- lower mantle, uniform and less variation

Most global seismic studies focus on the crustal and upper-mantle velocity structures.

Outer Core – liquid, iron-oxygen or iron-sulphur alloy, ($V_s=0$)

Inner Core – solid, iron, ($V_p = 3.7$ km/s)

Velocity range: P-wave: 5.0 km/s to 13.5 km/s

S-wave: 0.0 km/s to 7.0 km/s

Wave-propagation studies in the global scale:

Regional Pn –wave

Teleseismic P-wave and S-wave propagation

Surface-wave propagation at different scales

P-SV-Rayleigh-wave propagation plane

SH- Love-wave propagation plane

Technologies for imaging the Moho:

- Regional seismic modeling
- P- and S-wave receiver functions
- Surface-wave inversions
- Ambient noise interferometry

Technologies for imaging the upper mantle:

- P- and S-wave receiver functions
- Surface-wave inversions
- Multiple modeling at teleseismic distance

Near-Surface Geology and Velocity Structures

Topography variations, weathering layers over bedrock, overthrust, hidden layers, sink holes, and other anomalies ...

P-wave velocity range: 340 m/s to 6500 m/s

P-wave source: near-surface seismic waves include direct P, reflections, refractions, diffractions, conversions, and surface waves.

Synthetic full wavefield finite-difference simulation shall be demonstrated for the following situations:

- Propagation in a simple one-layer over half a space model
- Propagation in a positive linear-gradient layer over half a space model
- Propagation in a hidden-layer velocity model

What did we learn from the above snapshot movie show?


Seismic technologies for imaging the near-surface areas include:

- 1) Refraction traveltime interpretation methods
- 2) Refraction delay-time solutions
- 3) First-arrival traveltime tomography
- 4) Early-arrival waveform tomography
- 5) Refraction traveltime and wavefield migration

- 6) Refraction wavefield interferometric migration
- 7) Near-surface dispersion-curve inversions

Question 1): Is it possible that the P-wave velocity in the near-surface area is less than 340 m/s (air velocity)?

Question 2): Is the following raypath diagram possible? Why?

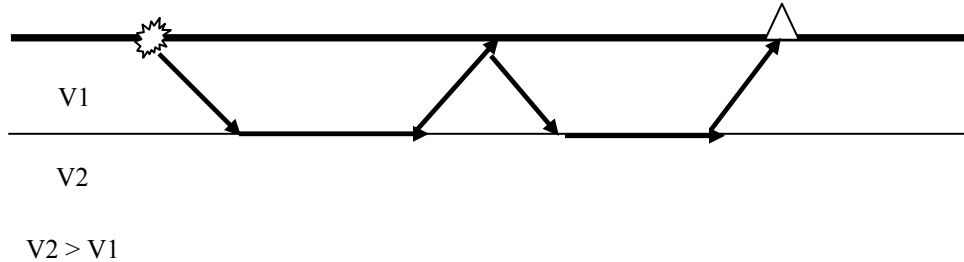

The Concept of Near-Surface Statics Corrections

Assumptions behind statics corrections:

Vertical travelttime correction: good for deep reflections, bad for shallow reflections


Surface-consistent: at a particular position, there is only one single statics for reflected waves coming with different incident angles to the surface and from different azimuth. When does that fail? Who knows? Just try and then you will learn from the brute stack!

Intermediate (floating) datum: down-going travelttime calculation with the velocity model resolved from near-surface imaging, from original shot or receiver position down to the Intermediate Datum.

Final (floating) datum: up-going travelttime calculation with a constant replacement velocity from the Intermediate Datum to the Final Datum.

Note: “floating” is the term as opposed to “flat.”


Replacement velocity: a constant velocity, usually the average of velocity below the intermediate datum.

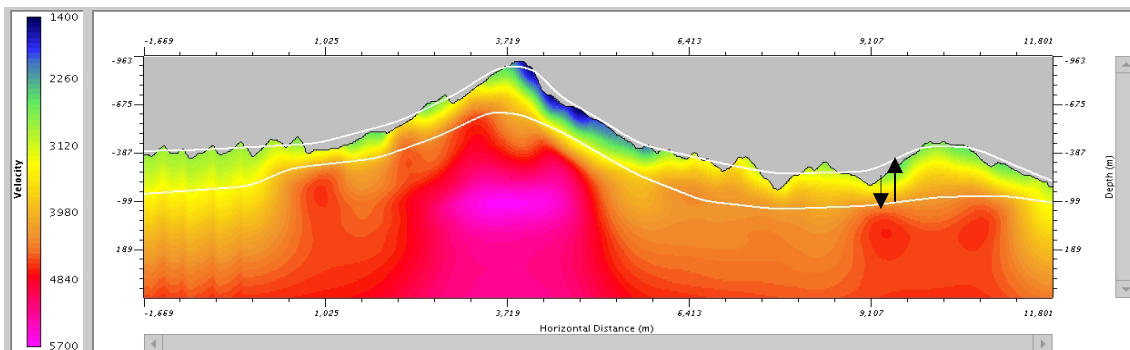

Statics should include:

- long-wavelength statics associated with the near-surface velocity model
- short-wavelength statics resolvable from refraction traveltime analysis
- residual statics usually from reflection stack-power maximization
- trim statics, usually derived from differentials in event times based on processing experiences

Calculated long-wavelength statics (shot statics in red, receiver statics in blue) using the above model and intermediate and final datum defined:

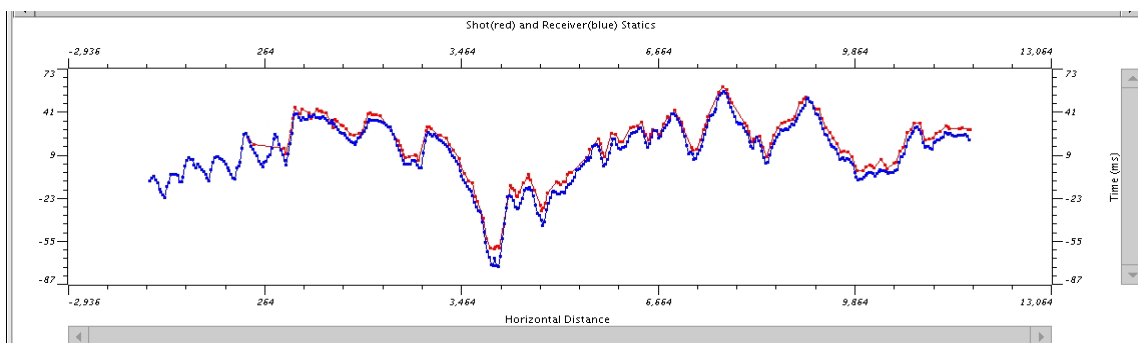

Review of Land Seismic Data Processing Workflow

Conventional seismic data processing workflow:

- Geometry building and QC
- Near-surface statics solutions (*high-end research*)
- Signal processing – reduce noise and surface waves, apply statics
- CMP sorting, Velocity Analysis, NMO Correction, DMO Correction
- Stacking (zero-offset), migrate in time and depth (Oz Yilmaz's workflow)

Prestack time- and depth-imaging workflow:

- Geometry building and QC
- Near-surface statics solutions (*high-end research*)
- Signal processing – reduce noise and surface waves, apply statics
- Picking RMS velocity fields (*high-end research*)
- Perform PSTM along with wavefield datuming
- Deriving the interval velocity model (*high-end research*)
- Perform PSDM