STOLT'S STRETCHING FUNCTIONS

Allan Jacobs

We start with the wave equation in Cartesian coordinates and transform to primed coordinates. The new system will take into account the difference between real and apparent depths caused by the z-dependence of velocity. The new system will also be a generalized version of retarded time coordinates, in which the $P'_{z'z'}$ term is Doppler shifted to zero, and in which the thin lens term is neglectable.

The relevant transformation equations are

$$t' = t + \int_0^z \frac{dz}{v(z)}$$

$$z' = \frac{1}{v_0} \int_0^z v(z)\, dz$$

$$x' = x$$

$$P'(x',z',t') = p(x,z,t)$$

The second of these equations can be explained by building a thin-plate model of the earth. We consider a plate at depth z, below the surface and a point scatterer lying below it at depth z_2+z_1 . Assume that the velocity is v_0 everywhere except inside the plate, in which the velocity is $v(z)$. Finally, call the apparent depth of the scatterer $z_2'+z_1$. We have using Snell's Law

$$\delta x = \Delta z \tan \theta_2$$

$$\approx \Delta z \sin \theta_2$$

$$\delta x \approx \frac{v}{v_0} \Delta z \sin \theta_1$$

$$z_2 \approx (x - \delta x) \frac{1}{\tan \theta_1}$$

$$z_2 \approx \frac{x - \delta x}{\sin \theta_1}$$

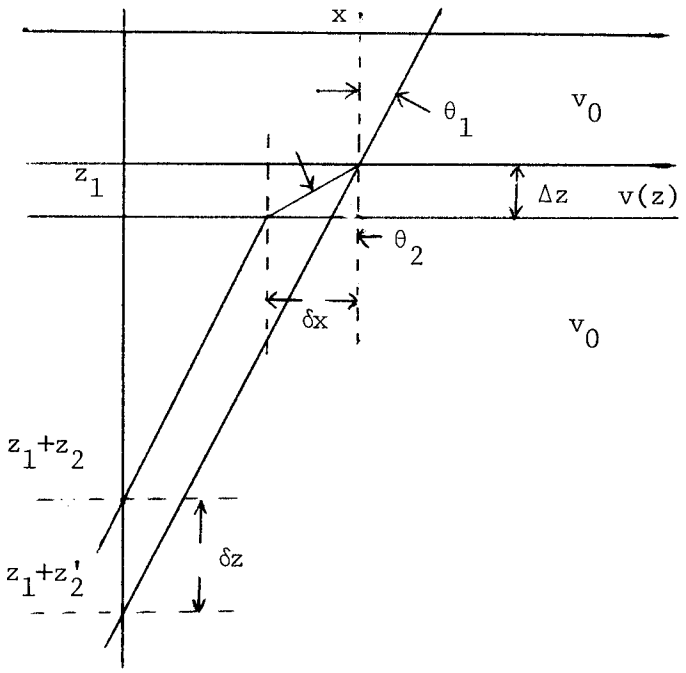

$$z_2' = \frac{x}{\sin \theta_1}$$

$$\delta z' = \frac{v}{v_0} \Delta z$$

If we were to integrate these from $z=z'=0$ to z , we would get the total apparent depth of the point in the layered earth. In other words

$$z' = \frac{1}{v_0} \int_0^z v(z)\, dz$$

Note that $v(z) = \frac{dz}{dt}$, so that, for arrivals at time t ,

$$z' = \frac{1}{v_0} \int_0^t v^2(t)\, dt = \frac{1}{v_0} v^2(t)_{rms} t \quad .$$

Next, we use this new coordinate system to construct a new version of the wave equation. Unfortunately, we will find that the final result will have a complicated structure - the condition for stopping the downward continuation of the geophones will be messy. Using the chain rule, we obtain

$$P_x = P'_{x'}$$

$$P_z = P'_{z'}Z'_z + P'_{t'}t'_z = \frac{v(z)}{v_0} P'_{z'} + \frac{1}{v(z)} P'_{t'}$$

$$P_t = P'_{t'}t'_t + P'_{z'}z'_t = P'_{t'}$$

The wave equation $P_{xx} + P_{zz} = \frac{1}{v^2} P_{tt}$ becomes, if $d_z v_z(z) << v_0$,

$$0 = P'_{x'x'} + \left(\frac{v}{v_0}\right)^2 P'_{z'z'} + \frac{1}{v(z)^2} P'_{t't'} + \frac{2}{v_0} P'_{z't'} - \frac{1}{v(z)^2} P'_{t't'}$$

$$0 = P'_{x'x'} + \left(\frac{v}{v_0}\right)^2 P'_{z'z'} + \frac{2}{v_0} P'_{z't'}$$

The migration consists of changing the field $P(x,z=0,t)$ to the final field $P(x,z=\delta(t'), t=0)$ where we have made use of the equation:

$$t' = t + \int_0^z \frac{dz}{v(z)} = \int_0^{\delta(t')} \frac{dz}{v(z)} \Bigg]_{t=0}$$

The stopping point is $z=\delta(t')$. An equivalent stopping point for the apparent depth z' is

$$z' \Big]_{t=0} = \frac{1}{v_0}\eta(t') = \frac{1}{v_0}\int_0^z v(z)\, dz \Bigg]_{z=\delta(t')}$$

$$\eta(t') = \int_0^{\delta(t')} v(z)\, dz = v_{rms}^2\, t'$$

Thus in the primed coordinate frame we have a final, and complicated, field of

$$P'\left(x',z' = \frac{1}{v_0}\eta(t'),\quad t' = \int_0^{\delta(t')} \frac{dz}{v(z)}\right)$$

Instead of this, it would be convenient if the final value of the depth coordinate were proportional to the final value of the time coordinate.

We therefore define a new depth coordinate d by the equation

$$d = \frac{z'v_0}{\eta}\ D(t')$$

where $D(t')$ will be the new, and so far undetermined, time coordinate. We will want to choose D so that the new wave equation is nearly independent of velocity. We set

$$P'(x',z',t') = P''(x',d,D) = P''(x,d,D)$$

in which case

$$P'_{z'} = P''_d\, d_{z'} = \frac{v_0}{\eta} D\, P''_d$$

$$P'_{z't'} = P''_{dd}\, d_{z'}, d_{t'} + P''_{dD}\, d_{z'}\, D_{t'}$$

$$P'_{z't'} = P''_{dd}\, \frac{v_0 D}{\eta}\ z'v_0 \frac{d}{dt'}\left(\frac{D}{\eta}\right) + P''_{dD}\, \frac{v_0 D}{\eta}\ \frac{d}{dt'}(D)$$

The condition that our wave equation stay approximately independent of v is equivalent to saying that the coefficient in front of the P''_{dD} be a constant and that all of the velocity dependence be dumped into the P''_{dd} term. We require that

$$\frac{v_0 D}{\eta} \frac{d}{dt'}(D) = v_0$$

which has a solution

$$D = \sqrt{2 \int_0^{t'} \eta(t')\, dt'}$$

Migration now consists of changing the field at the surface $P''(x,d=0,D)$ into the field at depth when $t=0$

$$P''(x,d=D,D>0)$$

The new version of the wave equation is found by using the chain rule. We have

$$D = \sqrt{2 \int_0^{t'} \eta(t')\, dt'}$$

so that

$$\frac{dD}{dt'} = \frac{\eta}{D}$$

$$\frac{d}{dt'}\left(\frac{D}{\eta}\right) = \frac{1}{D} + D \frac{d}{dt'}\left(\frac{1}{\eta}\right) = \frac{1}{D} - D \frac{v^2}{\eta^2}$$

so

$$P'_{z't'} = P''_{dd}\,\frac{z'v_0^2}{\eta} - P''_{dd}\,\frac{z'v^2D^2v_0}{\eta^{\eta}} + v_0\,P''_{dD}$$

$$P_{z'z'} = \frac{v_0^2D^2}{\eta^2}\,P''_{dd}$$

The wave equation is, dropping primes,

$$0 = P_{xx} + \left[\frac{v_0^2D^2}{\eta^2}\left(\frac{v^2}{v_0^2}\right) + \left(\frac{2}{v_0}\right)\left(\frac{z'v_0^2}{\eta} - \frac{z'v^2D^2v_0}{\eta^{\eta}}\right)\right]P_{dd} + 2P_{dD}$$

$$0 = P_{xx} + \left[\left(\frac{vD}{\eta}\right)^2 + \frac{2d}{D}\left[1 - \frac{v^2p^2}{\eta^2}\right]\right]P_{dd} + 2P_{dD}$$

$$0 = P_{xx} + W(x,d,D)P_{dd} + 2P_{dD}$$

Generally the $W\,P_{dd}$ is small, and neglectable if the dips are small, so it is expedient to substitute an average value for $W(x,d,D)$.

The new wave equation has a new dispersion relation. If we start with a two way travel time axis in the unmigrated time section, this dispersion relation is

$$W\,k_d^2 + k^2 - r\omega k_d = 0$$

where we have taken ω, k_d , and k to be the Fourier transform variables of D,d , and x , respectively. Using this relation the projection operator is of the form

$$\exp\left[-i\,(4\,(\omega/W)^2 - k_d^2/W)^{0.5}\right]$$

The scaling factor in the FK integral also has its factors appropriately scaled by W .

The computational strategy for setting a migrated time section is straightforward. We simply calculate the value of $\eta(t)$ at the surface, where $t=t'$, and plus this function into the integral expression for $D(t')$. This gives us a transformation before migration

$$d = \left[2 \int_0^t v_{rms}^2 (t)\ t\ dt \right]^{1/2}$$

After migration the section is in (x,d) space. But $d=D$ in this section, so we can use the mapping already constructed in the other direction to get the wave field as a function of t' again. Getting depth sections is another matter and involves some vertical ray tracing and axis stretching.

References

[1] Stolt, R. H., "Migration by Fourier Transform," *Geophysics*, 43, (1978), p. 23