# INHOMOGENEOUS POROELASTICITY

*James G. Berryman*
*Lawrence Livermore National Laboratory*
*P. O. Box 808 L-202*
*Livermore, CA 94551-9900*

# 1 Introduction

A limited theory of poroelasticity was formulated by Biot [1956a; 1956b]. He assumed linear, isotropic elastic response on the macroscopic scale for porous media composed of homogeneous frame materials and fully fluid-saturated pores. The principal attenuation mechanism of this theory was viscous attenuation due to shear induced during macroscopic flow of the single-phase fluid filling the pores. Even with these simplifications, the resulting theory has remained a scientific oddity for over 30 years: $(a)$ It is relatively hard to analyze the predictions of this theory [Burridge and Vargas 1979; Berryman 1985; Norris 1985; Bonnet 1987] because it involves two coupled wave equations forming a system somewhat more complex than the equations of viscoelasticity [Chin 1980; Bourbié, Coussy, and Zinszner 1987] – which are nontrivial to analyze themselves! $(b)$ The most startling predictions of the theory – such as the existence of a slow bulk compressional wave [Biot 1956a] or slow surface [Feng and Johnson 1983] and extensional waves [Berryman 1983] – are often very hard to verify in the laboratory [Plona 1980; Berryman 1980a; Salin and Schön 1981; Lakes, Yoon, and Katz 1983; van der Grinten, van Dongen, and van der Kogel 1985; Chin, Berryman, and Hedstrom 1985; Lakes, Yoon, and Katz 1986; Mayes, Nagy, Adler, Bonner, and Streit 1986; Dunn 1986; Dunn 1987]. $(c)$ Even the validity of the form of the equations and the physical interpretation of many of the coefficients in the equations remained unclear for 25 years [Biot and Willis 1957; Geertsma and Smit 1961; Berryman 1980a; Brown 1980; Johnson 1980; Burridge and Keller 1981; Johnson, Plona, Scala, Pasierb, and Kojima 1982], and in some cases are still in dispute today [Berryman 1986a; Berryman 1988]. It is therefore understandable that significant progress towards eliminating the many simplifying assumptions contained in the original work had not been made prior to the 1980s. Indeed, why complicate a subject which is already so difficult?

Often we try to argue that an elementary theory should suffice to explain the gross behavior of such complex materials, justifying our approximations with the comparative simplicity and elegance of the resulting theory. If the theory is really successful at explaining the preponderance of experimental data, then of course our arguments are justified and it appears to be of only academic interest to expend such effort as would be required to construct a truly comprehensive theory. On the other hand, the theory to date has been unable to explain some of the most elementary experimental results for waves in geological materials, so it is essential to produce a more sophisticated theory capable of treating most of the complications encountered in practice. The need for a more realistic theory drives us to remove the simplifying assumptions. And this need for a more realistic theory becomes most apparent when we try to analyze sound wave data for real porous materials. For many of the geophysical applications of greatest interest, the pertinent geological materials are anisotropic and very heterogeneous, composed of multiple solid frame materials and multiple pore fluids. In some applications, the exciting waves are of large amplitude so that linear equations of motion are simply inadequate to describe the phenomena we want to study.

Various extensions of the elementary theory have been introduced. Biot himself had generalized the theory to include anisotropic effects for dynamic problems [Biot 1962a] and nonlinear effects for quasistatic problems [Biot 1973]. When the saturating fluid is air [Sabatier, Bass, Bolen, Attenborough, and Sastry 1986; Attenborough 1987; Nagy, Adler, and Bonner 1990], connections between Biot's theory and earlier work on rigid frame porous media [Zwikker and Kosten 1949] have also been explored. Various other authors have treated the generalization to partial saturation at very low frequencies in an intuitively appealing manner [Domenico 1974; Brown and Korringa 1975; Domenico 1977; Murphy 1982; Murphy 1984], but without having any clear procedure for generalizing their results for higher frequencies. The form of the equations for the elastic coefficients when the solid frame material is composed of two or more constituents has been known for some time [Brown and Korringa 1975], but no method for obtaining the required data had been suggested.

One goal of our research is a comprehensive theory of dynamic poroelasticity. Irreversible pore collapse [Schatz 1976] is important in some of our applications, but we have neglected such effects initially in order to construct what is otherwise a quite general Lagrangian variational principle [Berryman and Thigpen 1985c] for nonlinear and semilinear (reversible) deformations of dry and fluid saturated porous solids. This approach is very closely related to an Eulerian variational formulation of Drumheller and Bedford [1980] for flow of complex mixtures of fluids and solids. We have shown that our theory reduces correctly to Biot's equations of poroelasticity [Biot 1956a] for small amplitude wave propagation and that it also reduces correctly to Biot's theory of nonlinear and semilinear rheology for porous solids [Biot 1973] when the deformations are sufficiently slow. The resulting theory is a nontrivial generalization of Biot's ideas including explicit equations of motion for changes of solid and fluid density. Furthermore, if we assume that capillary pressure effects may be neglected, then the linear theory also shows that calculations on problems with only partially saturated pores may be reduced to computations of the same level of difficulty as those for fully saturated pores [Berryman and Thigpen 1985b]. Appropriate boundary conditions have been found to guarantee that solutions of these equations are unique [Deresiewicz and Skalak 1963; Berryman and Thigpen 1985b]. We expect the general theory to give a very good account of the behavior of wet porous materials during elastic deformations.

In the presentation that follows, we will concentrate on three extensions of the theory of poroelasticity that tend to make the theory more realistic for applications to rocks. First, we show how the theory may be generalized to partially saturated porous media. Then, we use an effective medium method to find estimates of the coefficients in the equations when the frame material surrounding the pores is inhomogeneous. Finally, we analyze the attenuation of the fast compressional wave in heterogeneous media and show that the physically correct damping coefficient depends not on the global permeability, but on a spatial average of the local permeability.

## 2 Wave Equations for Multiple Fluid Saturation

When the mechanical and thermodynamical processes set in motion by a deformation are reversible, an energy functional which includes all the important effects involved in the motion may be constructed. Equations of motion may then be found by an application of Hamilton's principle. Such variational methods based on energy functionals are well-known in continuum mechanics [Bedford 1985]. Thus, the only really new feature in the present context is the degree of complexity; porous earth may be composed of many types of solid constituents and the pore space may be filled with a mixture of water and air. Some irreversible effects may also be included in the variational method (e.g., losses of energy due to drag between constituents) when they may be analyzed in terms of a dissipation functional. Other irreversible effects such as those associated with collapse of the pore space lie outside the scope of the traditional variational approaches; the forms normally used for the energy functionals are quadratic with constant coefficients in the linear problems or simply positive definite polynomials with constant coefficients for nonlinear problems. During pore collapse, the usual assumptions about the form of the energy functionals are violated, so the usefulness of the variational method is questionable. However, if we restrict discussion to linear or semi-linear processes, the variational methods are entirely adequate.

Using these variational methods, Berryman and Thigpen [1985b] have shown that the general equations of motion for linear elastic wave propagation through an isotropic porous medium containing both liquid and gas (or, more generally, any two fluids) in the pores are given by

$$\Lambda_{(\xi)0}\ddot{\bar{\rho}}_{(\xi)} = -\frac{\partial E_{(\xi)}}{\partial \bar{\rho}_{(\xi)}} - \frac{\lambda_\phi}{\bar{\rho}^2_{(\xi)0}}, \tag{1}$$

$$\begin{aligned} &\rho_{(s)0}\ddot{u}_{(s)i} + \sum_{\gamma=g,l}\rho_{(s\gamma)0}(\ddot{u}_{(s)i} - \ddot{u}_{(\gamma)i}) \\ &= [\rho_{(s)0}\frac{\partial E_{(s)}}{\partial u_{(s)i,j}} + \lambda_\phi \phi_{(s)0}\delta_{ij}]_{,j} + d_{(s)i} + \rho_{(s)0}b_{(s)i}, \end{aligned} \tag{2}$$

and

$$\rho_{(\gamma)0}\ddot{u}_{(\gamma)i} + \sum_{\xi\neq\gamma}\rho_{(\gamma\xi)0}(\ddot{u}_{(\gamma)i} - \ddot{u}_{(\xi)i}) = \phi_{(\gamma)0}(\lambda_\phi)_{,i} + d_{(\gamma)i} + \rho_{(\gamma)0}b_{(\gamma)i} \tag{3}$$

where $\gamma = g$ or $l$ and $\xi = g, l$, or $s$. The generalization to multiple pore fluids is immediate: let the index $\gamma$ range over all fluids in the pores, and the index $\xi$ range over all the fluids and the solid frame. The displacements are $u_{(\xi)i}$. The local densities (mass per unit volume of constituent) are $\bar{\rho}_{(\xi)}$. The partial densities (mass per unit total volume) are $\rho_{(\xi)} = \phi_{(\xi)}\bar{\rho}_{(\xi)}$. The internal energies of these immiscible constituents are $E_{(\xi)}$. The induced mass coefficients are $\rho_{(s\gamma)0}$. The body forces are given by $b_{(\xi)i}$ and the drag forces by $d_{(\xi)i}$. Thigpen and Berryman [1985] have shown that the drag forces may be written in the form $d_{(\gamma)i} = -\sum_\xi D_{(\gamma\xi)}(\dot{u}_{(\xi)i} - \dot{u}_{(s)i})$ where $D_{(\gamma\xi)}$ is a symmetric, positive semidefinite matrix whose matrix elements satisfy $\sum_\gamma D_{(\gamma\xi)} = 0$ for $\xi = g$ or $l$. For the present discussion, we will ignore the effects of contact line motion that can be an added source of dissipation in partially saturated porous media [Dussan V. 1987; Miksis 1988]. We will also ignore possible effects of interaction torque that may lead to shear wave coupling between the pore fluids and the solid matrix [Liu and Katsube 1990].

One major simplification that occurs in the equations for partial saturation follows from (1) and the approximation $\Lambda_{(\xi)0} = 0$. We find that

$$\lambda_\phi = -\bar{\rho}^2_{(\xi)0}\frac{\partial E_{(\xi)}}{\partial \bar{\rho}_{(\xi)}} \equiv -p_{(\xi)} \tag{4}$$

where $p_{(\xi)}$ is the pressure for constituent $\xi$. Eq. (4) implies that all the pressures are equal – which is consistent with an assumption that capillary pressure effects are negligible for acoustics (also see [Santos, Corberó, and Douglas 1990; Santos, Douglas, Corberó, and Lovera 1990]). Without this approximation, the number of compressional waves through a porous medium will generally be one more than the number of fluids in its pores. This result is however dependent on the spatial arrangement of the fluids. If one fluid dominates and the others are mixed into the dominant one, then only two compressional waves are expected. When (4) is valid, only two compressional waves will be found regardless of the spatial arrangement of the fluids.

The subscript may subsequently be dropped from $p$. If $2e_{(\xi)ij} \equiv u_{(\xi)i,j} + u_{(\xi)j,i}$, then the first two strain invariants are defined by $I_{(\xi)1} = e_{(\xi)ii}$ and $I_{(\xi)2} = \frac{1}{2}[I_{(\xi)1}^2 - e_{(\xi)ij}e_{(\xi)ji}]$. The changes in density are defined by $\Delta\bar{\rho}_{(\xi)} = \bar{\rho}_{(\xi)} - \bar{\rho}_{(\xi)0}$. In terms of these invariants, the standard definitions of the internal energies for an isotropic medium are

$$\rho_{(s)0}E_{(s)} = \frac{1}{2}aI_{(s)1}^2 + bI_{(s)2} + cI_{(s)1}\Delta\bar{\rho}_{(s)} + \frac{1}{2}d\Delta\bar{\rho}_{(s)}^2 \tag{5}$$

and

$$\rho_{(\gamma)0}E_{(\gamma)} = \frac{1}{2}h_{(\gamma)}\Delta\bar{\rho}_{(\gamma)}^2 \tag{6}$$

for $\gamma = g, l$. Applying (4) to (5) and (6), we find

$$\begin{aligned} p &= \frac{\bar{\rho}_{(s)0}}{\phi_{(s)0}}(cI_{(s)1} + d\Delta\bar{\rho}_{(s)}) \\ &= \frac{\bar{\rho}_{(l)0}}{\phi_{(l)0}}h_{(l)}\Delta\bar{\rho}_{(l)} \quad (7) \\ &= \frac{\bar{\rho}_{(g)0}}{\phi_{(g)0}}h_{(g)}\Delta\bar{\rho}_{(g)}. \end{aligned} \tag{7}$$

The coefficients in (5) have been shown elsewhere [Berryman and Thigpen 1985c] to be related to measurable quantities: $a = \phi_{(s)0}K^*/(\sigma - \phi_{(f)0}) + \frac{4}{3}\mu^*$, $b = -2\mu^*$, $c = \phi_{(s)0}K^*/\bar{\rho}_{(s)0}(\sigma - \phi_{(f)0})$, and $d = [\phi_{(s)0}/\bar{\rho}_{(s)0}]^2K_{(s)}/(\sigma - \phi_{(f)0})$ where $\sigma = 1 - K^*/K_{(s)}$. The bulk and shear moduli of the drained porous solid frame are $K^*$ and $\mu^*$. The bulk modulus of the (assumed) single constituent composing the microscopically homogeneous frame is $K_{(s)}$. If the solid frame is composed of two or more constituents, then these formulas must be modified. The coefficient $h_{(\gamma)}$ is related to the bulk modulus $K_{(\gamma)}$ of the $\gamma$-th fluid constituent by

$$h_{(\gamma)} = \frac{\phi_{(\gamma)0}}{\bar{\rho}_{(\gamma)0}^2}K_{(\gamma)}. \tag{8}$$

These equations are all based in essential ways on Gassmann's equations [Gassmann 1951; Biot and Willis 1957; Brown and Korringa 1975]. Methods for generalizing these relations for isotropic porous materials will be presented in Section 5. The methods presented here could easily be generalized for anisotropic porous media, but at the present time little work has been done to identify appropriate measurements to determine the coefficients needed in the resulting equations so we will not pursue this line of research here.

Now we define the linearized increment of fluid content for partial saturation to be

$$\zeta \equiv I_{(s)1} + \sum_{\xi} \frac{\phi_{(\xi)0}}{\bar{\rho}_{(\xi)0}}\Delta\bar{\rho}_{(\xi)}. \tag{9}$$

If only one fluid phase is present, (9) reduces to the exact result obtained previously [Berryman and Thigpen 1985c]. If more than one fluid phase is present, then we observe that by defining an effective total fluid density change according to

$$\frac{\phi_{(f)0}}{\bar{\rho}_{(f)0}}\Delta\bar{\rho}_{(f)} \equiv \frac{\phi_{(g)0}}{\bar{\rho}_{(g)0}}\Delta\bar{\rho}_{(g)} + \frac{\phi_{(l)0}}{\bar{\rho}_{(l)0}}\Delta\bar{\rho}_{(l)} \tag{10}$$

with $\phi_{(f)0} \equiv \sum_\gamma \phi_{(\gamma)0}$ and we find that (9) reduces again to the exact result. Furthermore, applying (8), it is straight forward to show that (4) implies that

$$\frac{\Delta\bar{\rho}_{(\gamma)}}{\bar{\rho}_{(\gamma)0}} = \frac{p}{K_{(\gamma)}} \tag{11}$$

for $\gamma = g$ or $l$. Substituting (11) into both sides of (10) shows that the effective bulk modulus of the multiphase fluid is given by

$$\frac{\phi_{(f)0}}{K_{(f)}} \equiv \sum_\gamma \frac{\phi_{(\gamma)0}}{K_{(\gamma)}} \tag{12}$$

which is just the harmonic mean or Reuss average of the constituents' bulk moduli.

To check the consistency of our definition of $\zeta$, we can show easily that

$$\zeta = \sum_\gamma \phi_{(\gamma)0}[I_{(s)1} - I_{(\gamma)1}]. \tag{13}$$

If we define the average displacement of a fluid relative to the solid frame by

$$w_{(\gamma)i} = \phi_{(\gamma)0}[u_{(\gamma)i} - u_{(s)i}] \tag{14}$$

for $\gamma = g$ or $l$ and the total relative fluid displacement by

$$w_i = \sum_\gamma w_{(\gamma)i}, \tag{15}$$

then (13) becomes

$$\zeta = -w_{i,i}. \tag{16}$$

Equation (16) reduces to the standard definition for full saturation when only one fluid saturates the pore space and is a natural generalization of this definition for partially saturated materials.

The total relative fluid displacement $w_i$ defined by (15) is important in partial saturation problems not only because of the analogy just developed with the fully saturated problems, but also for convenience in applying boundary conditions in practical problems. Berryman and Thigpen [1985b] have shown previously that uniqueness of the solutions to the equations (1)-(3) demands the specification of either $p$ or the normal component of this same $w_i$ on the boundaries of the porous material. Therefore, it proves most convenient to combine these equations so that $u_{(s)i}$ and $w_i$ are the dependent variables. We will subsequently drop the subscript $(s)$ on $u_i$ since no confusion will arise and also define $e \equiv I_{(s)1}$. In addition, the zero subscripts on density and volume fraction may also be dropped in the remainder of the analysis.

To determine the relations among $p, \zeta$, and $e$, substitute (11) and the first equation of (4) into (8) to eliminate $\Delta\bar{\rho}_{(\xi)}$ for all $\xi$. Using known identities and rearranging terms, we find easily that

$$p = M\zeta - Ce \tag{17}$$

where the coefficients $C$ and $M$ are given by

$$C = \{[(\sigma - \phi_{(g)} - \phi_{(l)})/K_{(s)} + \phi_{(g)}/K_{(g)} + \phi_{(l)}/K_{(l)}]/\sigma\}^{-1}, \tag{18}$$

and

$$M = C/\sigma \tag{19}$$

with

$$\sigma = 1 - K^*/K_{(s)}. \tag{20}$$

Substituting (12) into (18) gives

$$C = \{[(\sigma - \phi_{(f)0})/K_{(s)} + \phi_{(f)0}/K_{(f)}]/\sigma\}^{-1} \tag{21}$$

which is the standard result for single-phase saturation [Gassmann 1951].

Next we suppose the body forces vanish and sum the equations (2) and (3) to obtain

$$\rho\ddot{u}_i + \bar{\rho}_{(g)}\ddot{w}_{(g)i} + \bar{\rho}_{(l)}\ddot{w}_{(l)i} = [\rho_{(s)}\frac{\partial E_{(s)}}{\partial u_{i,j}} - p\delta_{ij}]_{,j} \tag{22}$$

where $\rho = \sum_\xi \rho_{(\xi)}$. Dividing (3) through by $\phi_{(f)0}$ and rearranging terms, we find

$$\bar{\rho}_{(g)}\ddot{u}_i + \frac{\alpha_{(g)}\bar{\rho}_{(g)}}{\phi_{(g)}}\ddot{w}_{(g)i} + \frac{D_{(gg)}}{\phi^2_{(g)}}\dot{w}_{(g)i} - \frac{\rho_{(gl)}}{\phi^2_{(g)}}\ddot{w}_{(l)i} = -p_{,i} \tag{23}$$

and

$$\bar{\rho}_{(l)}\ddot{u}_i + \frac{\alpha_{(l)}\bar{\rho}_{(l)}}{\phi_{(l)}}\ddot{w}_{(l)i} + \frac{D_{(ll)}}{\phi^2_{(l)}}\dot{w}_{(l)i} - \frac{\rho_{(lg)}}{\phi^2_{(l)}}\ddot{w}_{(g)i} = -p_{,i}. \tag{24}$$

If an electrical tortuosity for a porous material is given by $\alpha = \phi F$ where $\phi$ is the effective porosity and $F$ is the effective electrical formation factor (ratio of the conductivity of a conducting fluid to that of the insulating porous material when it contains the conducting fluid), then in (23) and (24) $\alpha_{(g)}$ is the electrical tortuosity of the pore space occupied only by the gas, while $\alpha_{(l)}$ is the electrical tortuosity of the pore space occupied only by the liquid. Introducing a Fourier time dependence of the form $exp(-i\omega t)$ into (23) and (24), combining, rearranging terms, and keeping the same names for the transformed and untransformed variables, we have

$$-\omega^2 \begin{pmatrix} q_{(g)} & -r_{(g)} \\ -r_{(l)} & q_{(l)} \end{pmatrix} \begin{pmatrix} w_{(g)i} \\ w_{(l)i} \end{pmatrix} = \begin{pmatrix} -p_{,i} + \omega^2\bar{\rho}_{(g)0}u_i \\ -p_{,i} + \omega^2\bar{\rho}_{(l)0}u_i \end{pmatrix} \tag{25}$$

where

$$\phi_{(\gamma)0}^2 q_{(\gamma)} \equiv \alpha_{(\gamma)}\rho_{(\gamma)0} + iD_{(\bar{\gamma}\gamma)}/\omega \tag{26}$$

and

$$\phi_{(\gamma)0}^2 r_{(\gamma)} \equiv \rho_{(gl)0}. \tag{27}$$

In (26), $\bar{\gamma} \neq \gamma$ so $\bar{\gamma} = l$ or $g$ as $\gamma = g$ or $l$. Inverting the matrix in (25) and summing the results gives

$$-\omega^2[q_{(g)}q_{(l)} - r_{(g)}r_{(l)}]w_i = -(s_{(g)} + s_{(l)})p_{,i} + \omega^2[s_{(g)}\bar{\rho}_{(l)} + s_{(l)}\bar{\rho}_{(g)}]u_i \tag{28}$$

where

$$s_{(\gamma)} = q_{(\gamma)} + r_{(\gamma)}. \tag{29}$$

Using the expressions for $w_{(\gamma)i}$ from (25) again, we find

$$\begin{aligned}\sum_\gamma \bar{\rho}_{(\gamma)}w_{(\gamma)i} &= \{[\bar{\rho}_{(g)}(q_{(l)} + r_{(g)}) + \bar{\rho}_{(l)}(q_{(g)} + r_{(l)})]p_{,i} \\ &\quad -\omega^2[q_{(l)}\bar{\rho}_{(g)}^2 + (r_{(g)} + r_{(l)})\bar{\rho}_{(g)}\bar{\rho}_{(l)} \\ &\quad +q_{(g)}\bar{\rho}_{(l)}^2]u_i\}/\omega^2[q_{(g)}q_{(l)} - r_{(g)}r_{(l)}] \\ &= \frac{\bar{\rho}_{(g)}(q_{(l)} + r_{(g)}) + \bar{\rho}_{(l)}(q_{(g)} + r_{(l)})}{s_{(g)} + s_{(l)}}w_i - \frac{(\bar{\rho}_{(g)} - \bar{\rho}_{(l)})^2}{s_{(g)} + s_{(l)}}u_i\end{aligned} \tag{30}$$

where $p_{,i}$ has been eliminated in the second step of (30) using (28).

The final form of these equations is found by substituting (30) into (22), using (18) in the result and also in (28), and finally rearranging terms. The equations then take the familiar form [Biot, 1962b; Stoll, 1989]

$$\mu\nabla^2\vec{u} + (H - \mu)\nabla e - C\nabla\zeta + \omega^2(\rho_{uu}\vec{u} + \rho_{uw}\vec{w}) = 0, \tag{31}$$

$$C\nabla e - M\nabla\zeta + \omega^2(\rho_{wu}\vec{u} + \rho_{ww}\vec{w}) = 0, \tag{32}$$

where the inertial coefficients are given by

$$\rho_{uu} = \rho - \frac{(\bar{\rho}_{(g)} - \bar{\rho}_{(l)})^2}{s_{(g)} + s_{(l)}}, \tag{33}$$

$$\rho_{wu} = \frac{\bar{\rho}_{(g)}s_{(l)} + \bar{\rho}_{(l)}s_{(g)}}{s_{(g)} + s_{(l)}} = \rho_{uw} + \frac{(r_{(l)} - r_{(g)})(\bar{\rho}_{(g)} - \bar{\rho}_{(l)})}{s_{(g)} + s_{(l)}}, \tag{34}$$

and

$$\rho_{ww} = \frac{q_{(g)}q_{(l)} - r_{(g)}r_{(l)}}{s_{(g)} + s_{(l)}}. \tag{35}$$

The coefficient $H$ is given by

$$H = K^* + \frac{4}{3}\mu^* + \sigma C \tag{36}$$

while $C$ and $M$ are given by (18) and (19). Thus, we find the remarkable result that the form of the equations of motion for partial saturation and for full saturation are the same – the only difference being that the inertial coefficients, as well as the $C$ and $M$ coefficients, are more complicated when the porous solid is only partially saturated.

## 3 Biot's Theory for Porous Materials with Inclusions

Now we will change notation somewhat and consider two isotropic porous media (i.e., host and inclusion) each of whose connected pore space is saturated with a single-phase viscous fluid. The fraction of the total volume occupied by the fluid is the void volume fraction or porosity $\phi$, which is assumed to be uniform within a constituent but which may vary between the the host and inclusion. The bulk modulus and density of the fluid are $K_f$ and $\rho_f$, respectively, in the host. The bulk and shear moduli of the drained porous frame for the host are $K$ and $\mu$. For now we assume the frame of the host is composed of a single constituent whose bulk and shear moduli and density are $K_m$, $\mu_m$, and $\rho_m$. Corresponding parameters for the inclusion will be distinguished by adding a prime superscript. The frame moduli may be measured directly [Stoll and Bryan 1970; Stoll 1977; Stoll 1989] or they may be estimated using one of the many methods developed to estimate elastic constants of composites [Berryman 1980b; Ogushwitz 1985].

For long-wavelength disturbances ($\lambda > h$, where $h$ is a typical pore size) propagating through such a porous medium, we define average values of the (local) displacements in the solid and also in the saturating fluid. The average displacement vector for the solid frame is $\vec{u}$ while that for the pore fluids is $\vec{u}_f$. The average displacement of the fluid relative to the frame is $\vec{w} = \phi(\vec{u}_f - \vec{u})$. For small strains, the frame dilatation is

$$e = e_x + e_y + e_z = \nabla \cdot \vec{u}, \tag{37}$$

where $e_x, e_y, e_z$ are the Cartesian strain components. Similarly, the average fluid dilatation is

$$e_f = \nabla \cdot \vec{u}_f \tag{38}$$

($e_f$ also includes flow terms as well as dilatation) and the increment of fluid content is defined by

$$\zeta = -\nabla \cdot \vec{w} = \phi(e - e_f). \tag{39}$$

With these definitions, Biot [1956a; 1956b; 1962b] shows that the strain-energy functional for an isotropic, linear medium is a quadratic function of the strain invariants [Love 1944] $I_1 = e, I_2$, and of $\zeta$ having the form

$$2E = He^2 - 2Ce\zeta + M\zeta^2 - 4\mu I_2, \tag{40}$$

where

$$I_2 = e_y e_z + e_z e_x + e_x e_y - \frac{1}{4}(\gamma_x^2 + \gamma_y^2 + \gamma_z^2), \tag{41}$$

and $\gamma_x, \gamma_y, \gamma_z$ are the shear strain components. Our earlier definitions (5) and (6) for partial saturation are completely consistent [Bedford and Drumheller 1979; Berryman and Thigpen 1985c] with these definitions.

With time dependence of the form $exp(-i\omega t)$, the Fourier transformed version of the coupled wave equations of poroelasticity in the presence of dissipation take the form

$$\mu\nabla^2\vec{u} + (H-\mu)\nabla e - C\nabla\zeta + \omega^2(\rho\vec{u} + \rho_f\vec{w}) = 0, \tag{42}$$

$$C\nabla e - M\nabla\zeta + \omega^2(\rho_f\vec{u} + q\vec{w}) = 0, \tag{43}$$

where

$$\rho = \phi\rho_f + (1-\phi)\rho_m \tag{44}$$

and

$$q = \rho_f[\alpha/\phi + iY(\xi)\eta/\kappa\omega]. \tag{45}$$

The kinematic viscosity of the liquid is $\eta$, the permeability of the porous frame is $\kappa$, and the dynamic viscosity factor [Biot 1956b; Norris 1986] is given (for our present choice of sign for the frequency dependence) by

$$Y(\xi) = \frac{1}{4}\xi T(\xi)/[1 + 2T(\xi)/i\xi], \tag{46}$$

where

$$T(\xi) = \frac{ber'(\xi) - ibei'(\xi)}{ber(\xi) - ibei(\xi)} \tag{47}$$

and

$$\xi = (\omega h^2/\eta)^{\frac{1}{2}}. \tag{48}$$

The functions $ber(\xi)$ and $bei(\xi)$ are the real and imaginary parts of the Kelvin function. The dynamic parameter $h$ is a characteristic length generally associated with (and comparable in magnitude to) the steady-flow hydraulic radius. The electrical tortuosity $\alpha$ is a pure number related to the frame inertia which has been measured [Johnson, Plona, Scala, Pasierb, and Kojima 1982] for porous glass bead samples and has also been estimated theoretically [Berryman 1980a; Brown 1980]. The electrical tortuosity $\alpha$ and the fluid flow tortuosity $\tau$ are related by $\alpha = \tau^2 = \phi F$, where $F$ is the electrical formation factor.

The coefficients $H, C$, and $M$ are given by [Gassmann 1951; Brown and Korringa 1975]

$$H = K + \frac{4}{3}\mu + \sigma C, \tag{49}$$

$$C = \{[(\sigma - \phi)/K_m + \phi/K_f]/\sigma\}^{-1}, \tag{50}$$

$$M = C/\sigma, \tag{51}$$

where

$$\sigma = 1 - K/K_m. \tag{52}$$

The wave equations (42) and (43) decouple into Helmholtz equations for three modes of propagation if we note that the displacements $\vec{u}$ and $\vec{w}$ can be decomposed as

$$\vec{u} = \nabla\Upsilon + \nabla \times \vec{\beta}, \ \ \vec{w} = \nabla\psi + \nabla \times \vec{\chi}, \tag{53}$$

where $\Upsilon$,$\psi$ are scalar potentials and $\vec{\beta}$,$\vec{\chi}$ are vector potentials. Substituting (53) into Biot's equations (42) and (43), we find they are satisfied if two pairs of equations hold:

$$(\nabla^2 + k_s^2)\vec{\beta} = 0, \ \ \vec{\chi} = -\Gamma_s\vec{\beta}, \tag{54}$$

where $\Gamma_s = \rho_f/q$ and

$$(\nabla^2 + k_\pm^2)A_\pm = 0. \tag{55}$$

In this notation, the subscripts $+$,$-$, and $s$ refer respectively to the fast and slow compressional waves and the shear wave.

The wave vectors in (54) and (55) are defined by

$$k_s^2 = \omega^2(\rho - \rho_f\Gamma_s)\mu \tag{56}$$

and

$$k_\pm^2 = (\omega^2/2\Delta)(b + f \mp [(b-f)^2 + 4cd]^{\frac{1}{2}}), \tag{57}$$

where

$$b = \rho M - \rho_f C, \ \ c = \rho_f M - qC, \ \ d = \rho_f H - \rho C, \ \ f = qH - \rho_f C, \tag{58}$$

with

$$\Delta = MH - C^2. \tag{59}$$

The linear combination of scalar potentials has been chosen to be

$$A_\pm = \Gamma_\pm\Upsilon + \psi, \tag{60}$$

where

$$\Gamma_\pm = d/[(k_\pm\Delta/\omega^2)^2 - b] = [(k_\pm\Delta/\omega^2)^2 - f]/c. \tag{61}$$

With the identification (61), the decoupling is complete.

Since (54) and (55) are valid for any choice of coordinate system, they may be applied to boundary value problems with arbitrary symmetry. Biot's theory has therefore been applied to the scattering of elastic waves from a spherical inhomogeneity [Berryman 1985]. The results of that calculation will be summarized in the next section.

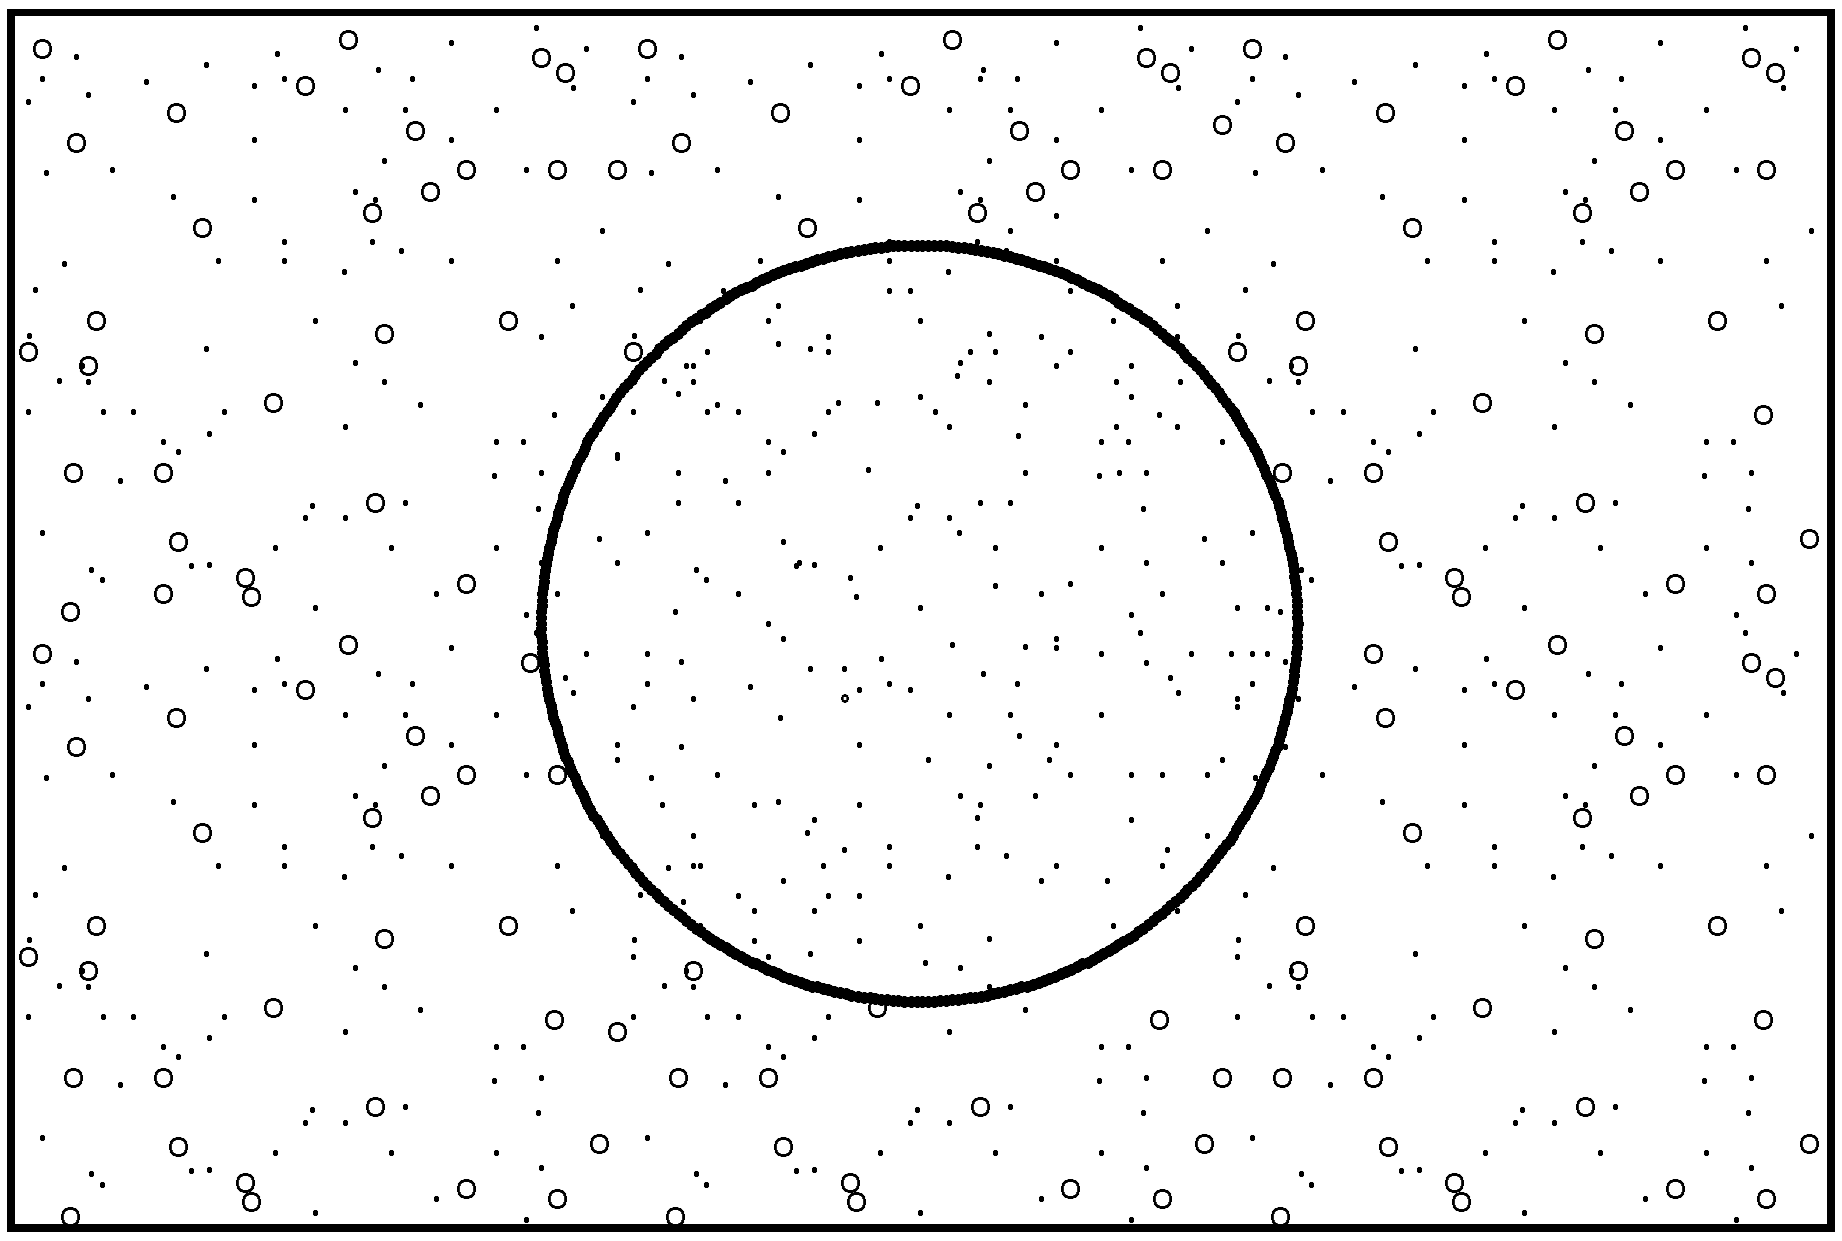

Figure 1: A spherical inclusion in a porous medium could be the result of local variations in fluid content, grain composition, porosity, permeability, etc.

# 4 Scattering from a Poroelastic Spherical Inclusion

The full analysis of scattering from a spherical inhomogeneity in a fluid-saturated isotropic porous medium is quite tedious. Fortunately, much of this work has already been done [Berryman 1985] and we may therefore merely quote the pertinent results here.

Let the spherical inhomogeneity (see Figure 1) have radius $a$. For the present, we will place no restrictions on the properties of the inhomogeneous region. Thus the frame bulk and shear moduli, the grain bulk modulus, the density, the porosity, and the permeability of a solid inclusion may all differ from those of the host. Furthermore, the bulk modulus, density, and viscosity of the fluid in an inhomogeneous region may also all differ from those of the host fluid. Suppose now that a plane fast compressional wave is generated at a free surface far from the inclusion. Then, if the incident fast compressional wave has the form

$$\vec{u} = \hat{z}\frac{A_0}{ik_+}\exp i(k_+ z - \omega t), \tag{62}$$

the radial component of the scattered compressional wave contains both fast and slow parts in the far field and is given by

$$\begin{aligned} u_{1r} = (ik_+)^{-1}\exp i(k_+r-\omega t)/k_+r[B_0^{(+)} - B_1^{(+)}\cos\theta - B_2^{(+)}(3\cos 2\theta+1)/4] \\ -(ik_-)^{-1}\exp i(k_-r-\omega t)/k_-r[B_0^{(-)} - B_1^{(-)}\cos\theta - B_2^{(-)}(3\cos 2\theta+1)/4]. \end{aligned} \tag{63}$$

Then, with the definitions $\kappa_\pm = k_\pm a$ and $\kappa_s = k_s a$ and with no restrictions on the materials, we find that

$$\begin{aligned} B_0^{(-)} = \frac{i\kappa_-^3 A_0}{3M'(\Gamma_+ - \Gamma_-)(K' + \frac{4}{3}\mu)}\Big[(C - M\Gamma_-)(K' + \frac{4}{3}\mu) \\ -(C' - M'\Gamma_-)(K + \frac{4}{3}\mu) + (C - M\Gamma_-)(C' - M'\Gamma_-)\Big(\frac{C'}{M'} - \frac{C}{M}\Big)\Big], \end{aligned} \tag{64}$$

and

$$B_0^{(+)} = \frac{\kappa_+^3 A_0}{3i}\frac{[K' - K + (C - M\Gamma_-)(C'/M' - C/M)]}{K' + \frac{4}{3}\mu} + (\kappa_+/\kappa_-)^3 B_0^{(-)}. \tag{65}$$

Expansions of the other coefficients in the small parameter $\epsilon = C/K$ have been given in [Berryman 1985]. However, for the present application, only the first two coefficients are needed and these happen to be the only ones known exactly at present. Of course, the full scattered wave also contains transverse components of the compressional wave, relative fluid/solid displacement, and mode converted shear waves. However, the scattering coefficients for these contributions are linearly dependent on the the coefficients in (63) and therefore contain no new information. It is sufficient then to base our discussion on the expression (63).

As an elementary check on our analysis, we should first consider the limit in which the porosity $\phi$ vanishes. Then the fluid effects disappear from the equations and only the first line of (63) survives. Furthermore, it is not difficult to check [Berryman 1985] that the coefficients $B_n^{(+)}$ for $n = 0, 1, 2$ reduce to the well-known results for scattering from a spherical elastic inclusion in an infinite elastic medium [Berryman 1980b]. For example,

$$B_0^{(+)} = -i\kappa_+^3 A_0(K' - K)/(3K' + 4\mu) \tag{66}$$

in this limit as expected.

These results have a multitude of potential uses. One straightforward application is the calculation of energy losses from elastic wave scattering by randomly distributed particles. A second important application is to use these results as the basis for an effective medium approximation for the effective constants of complex porous media. The second application is the one we will address in the next section.

## 5 Generalized Gassmann's Equations

As we have noted previously, the equations of poroelasticity have several significant limitations. For example, these equations were derived with an explicit long-wavelength (low-frequency) assumption and also with strong implicit assumptions of homogeneity and isotropy on the macroscopic scale. Another restriction assumes that the pore fluid is uniform and that it fully saturates the pore space. For the present application, we will assume that a single fluid saturates all the pore space for host as well as inclusion and the scattering is caused by microscopic heterogeneity in the solid properties.

Before deriving our main results, consider the problem of the porous frame without a saturating fluid (or with a highly compressible saturating gas). Then, since we take $C = M = \rho_f = 0$ in this limit, each term of Eq. (50) vanishes identically and the fluid dependent terms of Eq. (49) also vanish, leaving only the terms for the elastic behavior of the porous frame remaining. Since no slow wave can propagate under these circumstances, the second line of Eq. (63) disappears and only the fast wave terms contribute to the scattering. This limit is formally equivalent to the problem of elastic wave scattering from a spherical inclusion which has been treated in detail previously (see [Berryman 1980b] and other references therein). The effective medium approximation requires the weighted average of the single-scattering results to vanish. This method simulates the physical requirement that the forward scattering should vanish at infinity if the impedance of the "effective medium" has been well matched to that of the composite. The resulting condition is that the volume weighted average of each of the $B_n^{(+)}$s for $n = 0 - 2$ must vanish. Using the convention that the effective constants for the composite porous medium are distinguished by an asterisk, the formulas for the effective bulk ($K^*$) and shear($\mu^*$) moduli for the drained porous frame of a microscopically heterogeneous medium are

$$\frac{1}{K^* + \frac{4}{3}\mu^*} = \left\langle \frac{1}{K(\vec{x}) + \frac{4}{3}\mu^*} \right\rangle \tag{67}$$

and

$$\frac{1}{\mu^* + F^*} = \left\langle \frac{1}{\mu(\vec{x}) + F^*} \right\rangle \tag{68}$$

where

$$F = (\mu/6)(9K + 8\mu)/(K + 2\mu). \tag{69}$$

The spatial($\vec{x}$) average is denoted by $\langle\cdot\rangle$. The remaining constant to be determined is the effective density which is just the average density [Berryman 1985]. Equation (67) follows easily from the volume average of (66), while Eq. (68) follows similarly from the volume average of $B_2^+$. Note that the equations for $K^*$ and $\mu^*$ are coupled and therefore must be solved iteratively (i.e., self-consistently). Although the form of the equations (67) and (68) is identical to that obtained for elastic composites, the results can be quite different since the local constants $K(\vec{x})$ and $\mu(\vec{x})$ appearing in the formulas are frame moduli of the constituent spheres of drained porous material, not (necessarily) the moduli of the individual material grains. Of course, since the formula reduces correctly in the absence of porosity to the corresponding result for the purely elastic limit, the user of Eqs. (67) and (68) has some discretion about conceptually lumping grains together to form a porous frame or treating them as isolated elastic inclusions.

Now we will restrict discussion to the very low frequency limit where

$$\Gamma_+ = H/C \tag{70}$$

and

$$\Gamma_- = 0. \tag{71}$$

With these restrictions, the relevant scattering coefficients reduce to

$$B_0^{(-)} = \frac{i\kappa_-^3 C A_0}{3HM'(K' + \frac{4}{3}\mu)}\Big[C(K' + \frac{4}{3}\mu + \sigma' C') - C'(K + \frac{4}{3}\mu + \sigma C)\Big], \tag{72}$$

and

$$B_0^{(+)} = \frac{\kappa_+^3 A_0}{3i}\frac{[K' - K + (\sigma' - \sigma)C]}{K' + \frac{4}{3}\mu} + (\kappa_+/\kappa_-)^3 B_0^{(-)}. \tag{73}$$

The resulting conditions on the effective constants are

$$\Big\langle\frac{C^*[K(\vec{x}) + \frac{4}{3}\mu^* + \sigma(\vec{x})C(\vec{x})] - C(\vec{x})[K^* + \frac{4}{3}\mu^* + \sigma^* C^*]}{M(\vec{x})[K(\vec{x}) + \frac{4}{3}\mu^*]}\Big\rangle = 0 \tag{74}$$

and

$$\Big\langle\frac{K(\vec{x}) - K^* + [\sigma(\vec{x}) - \sigma^*]C^*}{K(\vec{x}) + \frac{4}{3}\mu^*}\Big\rangle = 0. \tag{75}$$

Recall that the averages in (74) and (75), as elsewhere in this paper, refer to spatial averages over (possibly) porous constituents of the overall porous aggregate. The limitations on the assumed geometry of the resulting aggregate have been discussed previously [Berryman 1986b]. Note that (74) and (75) depend on the effective medium frame moduli $K^*$ and $\mu^*$ determined by (67) and (68). The new constants determined by (74) and (75) are $C^*$ and $\sigma^*$. The expressions for $C^*$ and $\sigma^*$ are coupled as written but may be decoupled after some algebra. The final expressions for these constants are

$$C^* = \sigma^*\Big/\Big[\Big\langle\frac{1}{M(\vec{x})}\Big\rangle + \Big\langle\frac{\sigma^2(\vec{x}) - (\sigma^*)^2}{K(\vec{x}) + \frac{4}{3}\mu^*}\Big\rangle\Big] \tag{76}$$

and

$$\sigma^* = \Big\langle\frac{\sigma(\vec{x})}{K(\vec{x}) + \frac{4}{3}\mu^*}\Big\rangle\Big/\Big\langle\frac{1}{K(\vec{x}) + \frac{4}{3}\mu^*}\Big\rangle. \tag{77}$$

Notice that both constants are determined explicitly by the formulas, in contrast to the frame moduli $K^*$ and $\mu^*$ which are determined only implicitly by (67) and (68). The author has also shown [Berryman 1986b] that (76) and (77) are completely consistent with all known constraints [Gassmann 1951; Brown and Korringa 1975] on the form of these coefficients.

The same idea used to derive (76) and (77) was also used to show [Berryman and Thigpen 1985a] that the speed of waves propagating through a mixture of liquid and gas in the low frequency limit is given by Wood's formula [Wood 1957] as expected [Brown and Korringa 1975; Murphy 1984].

Recently Berryman and Milton [1991] have derived exact results for generalized Gassmann's equations in composite porous media with two constituents.

# 6 Effects of Inhomogeneous Fluid Permeability

A convincing demonstration has been given by Mochizuki [1982] that, if we assume global fluid-flow effects dominate the viscous dissipation, Biot's theory of poroelasticity cannot explain the observed magnitude of wave attenuation in partially saturated rocks. Since the same theory explains the wave speeds quite well, it is reasonable to suppose that a small change in the theory may be adequate to repair this flaw. Many explanations are possible of course, but within the context of Biot's theory the simplest postulate is to suppose that local – rather than global – fluid-flow effects dominate the dissipation [Berryman 1986a; Berryman 1988]. We will distinguish two related issues in this section which are summarized in the following questions: ($a$) Does the physics of wave propagation require that the value of the permeability $\kappa$ appearing in Biot's equations should be that for global flow or for local flow? Then, if we can show that the value should be that for local flow, ($b$) does this change in the interpretation make enough difference so that the theory can explain the correct magnitude for the attenuation?

To address the first question, we explore the consequences of assuming that Biot's theory should be applied at the local flow level rather than at the global flow level. This assessment is easily done by examining the dispersion relations. When the Fourier time dependence is $e^{-i\omega t}$ with angular frequency $\omega$ sufficiently low, Biot's theory predicts [see Eq. (57)] the dispersion relations for the fast (+) and slow (−) compressional modes in any homogeneous porous material to be

$$k_+^2 \simeq \frac{\omega^2}{v_+^2}[1 + i\omega\frac{\rho_f^2}{\rho q_0}(1 - v_0^2/v_+^2)^2] \tag{78}$$

and

$$k_-^2 \simeq \frac{i\omega q_0 H}{MH - C^2} \tag{79}$$

where

$$v_+^2 = H/\rho, v_0^2 = C/\rho_f, q_0 = \rho_f\eta/\kappa. \tag{80}$$

The fraction of the total volume occupied by the fluid is the void volume fraction or porosity $\phi$, which is assumed to be uniform. The bulk modulus and density of the fluid are $K_f$ and $\rho_f$. The bulk and shear moduli of the drained porous frame are $K$ and $\mu$. For simplicity we assume the frame is composed of a single constituent whose bulk and shear moduli and density are $K_m$, $\mu_m$, and $\rho_m$. Then the coefficients $H, C$, and $M$ are given by (49)-(52). The overall density is

$$\rho = \phi\rho_f + (1 - \phi)\rho_m. \tag{81}$$

The kinematic viscosity of the fluid is $\eta$ and the permeability of the porous frame is $\kappa$.

Defining the quality factor for the fast compressional wave $Q_+$ by

$$k_+^2 = \frac{\omega^2}{v_+^2}[1 + i/Q_+], \tag{82}$$

we find [Berryman, Thigpen, and Chin 1988] that $Q_+$ is given by

$$1/Q_+ = \omega\frac{\kappa\rho_f}{\eta\rho}(1 - v_0^2/v_+^2)^2. \tag{83}$$

Since $1/Q_+$ is proportional to the permeability, the attenuation is therefore greatest in regions of high permeability. Thus, we might say that the regions of high permeability control the attenuation.

In the very low frequency limit, the slow compressional mode is known to reduce to Darcy flow with slowly changing magnitude and direction as the driving potential gradient oscillates sinusoidally [Johnson, Koplik, and Dashen 1987; Sheng and Zhou, 1988; Charlaix, Kushnick, and Stokes 1988; Johnson 1989; Zhou and Sheng 1989]. Now consider a layered porous material (whose constants depend only on depth $z$) with constituents having identical physical constants except for the permeability $\kappa$ which varies widely from layer to layer but which has a constant value $\kappa_n$ within the $n$-th layer (lying in the range $z_{n-1} \leq z \leq z_n$ with $z_0 = 0$). Thus, the permeability is a piecewise constant function of $z$. The thickness of the $n$-th layer is given by $l_n = z_n - z_{n-1}$. If we impose a potential gradient along the $z$-direction in such a layered material, it is well-known that the effective permeability for fluid flow is found by taking the harmonic mean of the constituent permeabilities, *i.e.*,

$$1/\kappa_f = \frac{1}{L}\sum_n \frac{l_n}{\kappa_n}, \tag{84}$$

where the total sample length $L$ is given by the sum of the layer thicknesses

$$L = \sum_n l_n. \tag{85}$$

From (84), we can conclude that the regions of lowest permeability dominate the effective overall permeability for fluid flow through a porous layered medium. Thus, we might say that the regions of low permeability control the fluid flow – at least for this special choice of geometry.

The apparent attenuation of a fast compressional mode at normal incidence on such a structure has two distinct components: ($a$) Reflection and mode conversion at layer interfaces will have a tendency to degrade the fast wave, but this effect will be quite small at low frequencies for the model structure we are considering. ($b$) The attenuation within a layer is determined by the quality factor for that layer, as shown by Eq. (82). Assuming the attenuation is small enough, we may approximate (82) within any layer by $k_+(z) = \frac{\omega}{v_+}[1 + i/2Q_+(z)]$, where the functions $k_+(z)$ and $Q_+(z)$ take the piecewise constant values appropriate for the depth argument $z$. Neglecting the small effects of reflection and mode conversion, the behavior of the fast compressional wave at normal incidence is then easily seen to be given by

$$A_+ exp[i\int_0^z dz k_+(z) - i\omega t] \simeq A_+ exp[i\frac{\omega}{v_+}z - i\omega t - \frac{\omega}{v_+}\int_0^z dz\frac{1}{2Q_+(z)}], \tag{86}$$

where $A_+$ is the amplitude of the wave at $z = 0$. In writing (86), we have used the piecewise constant property of the functions. The integral in the exponent is given by

$$\int_0^z dz\frac{1}{2Q_+(z)} = \frac{\omega\rho_f}{2\eta\rho}(1 - v_0^2/v_+^2)^2\int_0^z dz\kappa(z). \tag{87}$$

At the $z = L$ boundary of the material, we have

$$\int_0^L dz\kappa(z) = \sum_n l_n\kappa_n. \tag{88}$$

If the layering is periodic with period much less than either $z$ or $L$ or if it is statistically homogeneous on this length scale, then we may approximate the integral in the exponent of (86) using (87) and

$$\int_0^z dz\kappa(z) \simeq \kappa_a z, \tag{89}$$

where the effective permeability for attenuation measurements is given by the mean

$$\kappa_a = \frac{1}{L}\sum_n l_n \kappa_n. \tag{90}$$

It is well-known that the mean is always greater than or equal to the harmonic mean of any function; thus,

$$\kappa_f \le \kappa_a. \tag{91}$$

The answer to our first question is that the physics of wave propagation dictates that local-flow effects dominate the attenuation of the fast compressional wave. The necessity of this conclusion is nicely illustrated in Figure 2. Suppose that a fast compressional wave is incident on a layered material with alternating permeable and impermeable layers. If the impermeable layers are very thin and have an acoustic impedance closely matching that of the permeable layers, their presence has a negligible effect on the propagating fast wave. The viscous attenuation of the fast wave occurs solely in the permeable layers and magnitude of that attenuation is completely determined by the permeability of these layers. By contrast, the global permeability of this material in the direction normal to the layering vanishes identically. If this null value were used in our predictions, the magnitude of the attenuation would be grossly underestimated. Although this choice of geometry is extreme, it clearly shows that errors in estimates of attenuation will arise if the value of permeability for global flow is used.

Now, can the theory predict the correct magnitude for the attenuation even with this change in the interpretation of the permeability factor? To predict the wave attenuation from measurements of permeability, we need some independent means of measuring the local permeability distribution. Normal laboratory flow experiments will not suffice, because they necessarily measure the global permeability. One promising method of estimating the local permeability uses image processing techniques to measure pertinent statistical properties of rock topology from pictures of cross sections [Berryman and Blair 1986; Berryman and Blair 1987]. This approach is still under development and we will not attempt to describe it in detail here.

Another approach, which is ultimately much less satisfactory than the image processing method but much easier to use at present, is to suppose that we can obtain reasonable estimates of the local permeability $\kappa_L$ from the known values of the global permeability $\kappa_G$, the tortuosity $\tau = (\phi F)^{\frac{1}{2}}$, and the porosity $\phi$. To do so requires some formula, so we will use a form of the Kozeny-Carman relation derived by Walsh and Brace [1984]. For tubes of arbitrary ellipsoidal (major and minor axes $a$,$b$) cross-section the effective permeability of straight sections of such tubes is given by $\kappa = (\pi/4A)[a^3b^3/(a^2+b^2)]$. The porosity for an ellipsoidal tube is $\phi = \pi ab/A$ and the specific surface area is well approximated by $s \simeq 2\pi[(a^2+b^2)/2]^{\frac{1}{2}}/A$. Then, a Kozeny-Carman relation satisfied by $\kappa$, $\phi$, and $s$ can be shown to be

$$\kappa = \frac{1}{2}\frac{\phi^3}{s^2} \tag{92}$$

for the effective permeability of a single tube oriented along the pressure gradient. If the tube is at an angle $\theta$ to this gradient, then Walsh and Brace [1984] show that

$$\kappa = \frac{1}{2}\frac{\phi^3}{s^2\tau^2}, \tag{93}$$

where $\tau = 1/cos\theta$. If we suppose that (92) and (93) are fairly representative of the material of interest, then (92) describes the maximum local permeability $\kappa_L$ and (93) the effective global permeability $\kappa_G$. We then conclude that

$$\kappa_L = \tau^2\kappa_G = \phi F \kappa_G. \tag{94}$$

The tortuosity $\tau$ has been measured for many sandstones; the values for samples studied by Simmons, Wilkens, Caruso, Wissler, and Miller [1982; 1983] lie in the range $2 \leq \tau \leq 5$, with most values $\tau \simeq 2$. To obtain estimates of attenuation close to experiment [Murphy 1982], we need to increase the value of permeability used in Mochizuki's calculations [Mochizuki 1982] by a factor of $\tau^2 \simeq 10$. This requirement implies a tortuosity of $\tau \simeq 3$, which is clearly well within the established experimental bounds. A more detailed analysis leading to the same qualitative conclusions has also been presented recently [Berryman, Thigpen, and Chin 1988]. These arguments provide strong evidence for the plausibility of a local-flow explanation of the observed discrepancies. However, a completely satisfying demonstration must await the collection of the required data on local-flow permeability.

One unfortunate consequence of the observation that local permeability controls attenuation is that measured attenuation in wet rocks cannot be used as a diagnostic of the global fluid-flow permeability. Nevertheless, since the mean of the local permeabilities will always be greater than the true fluid-flow permeability regardless of the actual spatial distribution of the constituent $\kappa$'s, the effective permeability computed from attenuation measurements can be used to provide an upper bound on the desired global permeability.

# 7 Discussion

What then are the prospects for a comprehensive theory of poroelasticity? It appears likely at this point that we will soon have a completely satisfactory linear theory of bulk waves including effects of partial saturation and inhomogeneous frame materials. A satisfactory nonlinear theory of bulk waves including effects of fracture, plastic flow, and pore collapse is at a more elementary stage, but is still likely to be achieved in the 1990s. At present it appears that the problems most likely to cause real trouble are those involving surface waves rather than the bulk waves. Surface waves depend critically on the nature of the equations of motion near interfaces. Using the standard boundary conditions of poroelasticity [Deresiewicz and Skalak 1963; Berryman and Thigpen 1985b], it has been shown that a slow surface wave [Feng and Johnson 1983] or slow extensional wave [Berryman 1983] is expected only when a closed-pore boundary condition applies at the porous surface. Yet, the experimental data to date seem to show that such slow surface waves [Mayes, Nagy, Adler, Bonner, and Streit 1986] do in fact propagate when the open-pore boundary condition applies. It is possible that the presence of a thin damage region close to the surface has a major effect on the conclusions of the theory regarding the propagation of the surface waves. However, it could also be that these experiments are pointing out still another subtle deficiency of the equations we use to describe wave propagation in porous media.

## Acknowledgments.

I thank S. C. Blair, B. P. Bonner, R. C. Y. Chin, M. J. Miksis, and L. Thigpen for very helpful discussions and collaborations. Work performed under the auspices of the U. S. Department of Energy by the Lawrence Livermore National Laboratory under contract No. W-7405-ENG-48 and supported specifically by the Geosciences Research Program of the DOE Office of Energy Research within the Office of Basic Energy Sciences, Division of Engineering and Geosciences.

## References

K. Attenborough (1987), On the acoustic slow wave in air-filled granular media, *J. Acoust. Soc. Am.*, **81**, pp. 93–102.

A. Bedford (1985), *Hamilton's Principle in Continuum Mechanics*, Research Notes in Mathematics, Vol. 139, Pitman, Boston.

A. Bedford and D. S. Drumheller (1979), A variational theory of porous media, *Int. J. Solids Structures*, **15**, pp. 967–980.

J. G. Berryman (1980a), Confirmation of Biot's theory, *Appl. Phys. Lett.*, **37**, pp. 382–384.

J. G. Berryman (1980b), Long-wavelength propagation in composite elastic media I. Spherical inclusions, *J. Acoust. Soc. Am.*, **68**, pp. 1809–1819.

J. G. Berryman (1983), Dispersion of extensional waves in fluid-saturated porous cylinders at ultrasonic frequencies, *J. Acoust. Soc. Am.*, **74**, pp. 1805–1812.

J. G. Berryman (1985), Scattering by a spherical inhomogeneity in a fluid-saturated porous medium, *J. Math. Phys.*, **26**, pp. 1408–1419.

J. G. Berryman (1986a), Elastic wave attenuation in rocks containing fluids, *Appl. Phys. Lett.*, **49**, pp. 552–554.

J. G. Berryman (1986b), Effective medium approximation for elastic properties of porous solids with microscopic heterogeneity, *J. Appl. Phys.*, **59**, pp. 1136–1140.

J. G. Berryman (1988), Seismic wave attenuation in fluid-saturated porous media, *Pure Appl. Geophys.*, **128**, pp. 423–432.

J. G. Berryman and S. C. Blair (1986), Use of digital image analysis to estimate fluid permeability of porous materials: Application of two-point correlation functions, *J. Appl. Phys.*, **60**, pp. 1930–1938.

J. G. Berryman and S. C. Blair (1987), Kozeny-Carman relations and image processing methods for estimating Darcy's constant, *J. Appl. Phys.*, **62**, pp. 2221–2228.

J. G. Berryman and G. W. Milton (1991), Exact results for generalized Gassmann's equations in composite porous media with two constituents, *Geophysics*, **56**, in press.

J. G. Berryman and L. Thigpen (1985a), Effective constants for wave propagation through partially saturated porous media, *Appl. Phys. Lett.*, *46*, pp. 722–724.

J. G. Berryman and L. Thigpen (1985b), Linear dynamic poroelasticity with microstructure for partially saturated porous solids, *ASME J. Appl. Mech.*, **52**, pp. 345–350.

J. G. Berryman and L. Thigpen (1985c), Nonlinear and semilinear dynamic poroelasticity with microstructure, *J. Mech. Phys. Solids*, *33*, pp. 97–116.

J. G. Berryman, L. Thigpen, and R. C. Y. Chin (1988), Bulk elastic wave propagation in partially saturated porous solids, *J. Acoust. Soc. Am.*, **84**, pp. 360–373.

M. A. Biot (1956a), Theory of propagation of elastic waves in a fluid-saturated porous solid. I. Low-frequency range, *J. Acoust. Soc. Am.*, **28**, pp. 168–178.

M. A. Biot (1956b), Theory of propagation of elastic waves in a fluid-saturated porous solid. II. Higher frequency range, *J. Acoust. Soc. Am.*, *28*, pp. 179–191.

M. A. Biot (1962a), Generalized theory of acoustic propagation in porous dissipative media, *J. Acoust. Soc. Am.*, **34**, pp. 1254–1264.

M. A. Biot (1962b), Mechanics of deformation and acoustic propagation in porous media, *J. Appl. Phys.*, **33**, pp. 1482–1498.

M. A. Biot (1973), Nonlinear and semilinear rheology of porous solids, *J. Geophys. Res.*, **78**, pp. 4924–4937.

M. A. Biot and D. G. Willis (1957), The elastic coefficients of the theory of consolidation, *J. Appl. Mech.*, **24**, pp. 594–601.

G. Bonnet (1987), Basic singular solutions for a poroelastic medium in the dynamic range, *J. Acoust. Soc. Am.*, **82**, pp. 1758–1762.

T. Bourbié, O. Coussy, and B. Zinszner (1987), *Acoustics of Porous Media*, Gulf, Houston, Chapt. 3.

R. J. S. Brown (1980), Connection between formation factor for electrical resistivity and fluid-solid coupling factor in Biot's equations for acoustic waves in fluid-filled porous media, *Geophysics*, **45**, pp. 1269–1275.

R. J. S. Brown and J. Korringa (1975), On the dependence of the elastic properties of a porous rock on the compressibility of the pore fluid, *Geophysics*, **40**, pp. 608–616.

R. Burridge and J. B. Keller (1981), Poroelasticity equations derived from microstructure, *J. Acoust. Soc. Am.*, **70**, pp. 1140–1146.

R. Burridge and C. A. Vargas (1979), The fundamental solution in dynamic poroelasticity, *Geophys. J. Roy. Astr. Soc.*, **58**, pp. 69–90.

E. Charlaix, A. P. Kushnick, and J. P. Stokes (1988), Experimental study of dynamic permeability in porous media, *Phys. Rev. Lett.*, **61**, pp. 1595–1598.

R. C. Y. Chin (1980), Wave propagation in viscoelastic media, in *Physics of the Earth's Interior*, Proceedings of the Enrico Fermi Summer School 1979, Course LXXVIII, North-Holland, Amsterdam, pp. 213–246.

R. C. Y. Chin, J. G. Berryman, and G. W. Hedstrom (1985), Generalized ray expansion for pulse propagation and attenuation in fluid-saturated porous media, *Wave Motion*, **7**, pp. 43–66.

H. Deresiewicz and R. Skalak (1963), On uniqueness in dynamic poroelasticity, *Bull. Seismol. Soc. Am.*, **53**, pp. 783–788.

S. N. Domenico (1974), Effects of water saturation of sand reservoirs encased in shales, *Geophysics*, **29**, pp. 759–769.

S. N. Domenico (1977), Elastic properties of unconsolidated sand reservoirs, *Geophysics*, **41**, pp. 882–894.

D. S. Drumheller and A. Bedford (1980), A thermomechanical theory for reacting immiscible mixtures, *Arch. Rational Mech. Anal.* **73**, pp. 257–284.

K.-J. Dunn (1986), Acoustic attenuation in fluid-saturated porous cylinders at low frequencies, *J. Acoust. Soc. Am.*, **79**, pp. 1709–1721.

K.-J. Dunn (1987), Sample boundary effect in acoustic attenuation of fluid-saturated porous cylinders, *J. Acoust. Soc. Am.*, **81**, pp. 1259–1266.

E. B. Dussan V. (1987), Incorporating the influence of wettability into models of immiscible fluid displacement through porous media, *Physics and Chemistry of Porous Media II*, AIP Conference Proceedings, Vol. 154, ed. J. R. Banavar, J. Koplik, and K. W. Winkler, AIP, New York, pp. 83–97

S. Feng and D. L. Johnson (1983), High-frequency acoustic properties of a fluid/porous solid interface. I. New surface mode, *J. Acoust. Soc. Am.*, **74**, pp. 906–914.

F. Gassmann (1951), Über die elastizität poröser medien, *Veirteljahrsschrift der Naturforschenden Gesellschaft in Zürich*, **96**, pp. 1–23.

J. Geertsma and D. C. Smit (1961), Some aspects of elastic wave propagation in fluid-saturated porous solids, *Geophysics*, **26**, pp. 169–181.

D. L. Johnson (1980), Equivalence between fourth sound in liquid He II at low temperatures and the Biot slow wave in consolidated porous media, *Appl. Phys. Lett.*, **37**, pp. 1065–1067.

D. L. Johnson (1989), Scaling function for dynamic permeability in porous media, *Phys. Rev. Lett.*, **63**, p. 580.

D. L. Johnson, J. Koplik, and R. Dashen (1987), Theory of dynamic permeability and tortuosity in fluid-saturated porous media, *J. Fluid Mech.*, **176**, pp. 379–402.

D. L. Johnson, T. J. Plona, C. Scala, F. Pasierb, and H. Kojima (1982), Tortuosity and acoustic slow waves, *Phys. Rev. Lett.*, **49**, pp. 1840–1844.

R. Lakes, H. S. Yoon, and J. L. Katz (1983), Slow compressional wave propagation in wet human and bovine cortical bone, *Science*, **220**, pp. 513–515.

R. Lakes, H. S. Yoon, and J. L. Katz (1986), Ultrasonic wave propagation and attenuation in wet bone, *J. Biomed. Engng.*, **8**, pp. 143–148.

Q.-R. Liu and N. Katsube (1990), The discovery of a second kind of rotational wave in a fluid-filled porous material, *J. Acoust. Soc. Am.*, **88**, pp. 1045–1053.

A. E. H. Love (1944), *A Treatise on the Mathematical Theory of Elasticity*, Dover, New York, pp. 43, 62, 102.

M. J. Mayes, P. B. Nagy, L. Adler, B. P. Bonner, and R. Streit (1986), Excitation of surface waves of different modes at fluid-porous solid interface, *J. Acoust. Soc. Am.*, **79**, pp. 249–252.

M. J. Miksis (1988), Effects of contact movement on the dissipation of waves in partially saturated rocks, *J. Geophys. Res.*, **93**, pp. 6624–6634.

S. Mochizuki (1982), Attenuation in partially saturated rocks, *J. Geophys. Res.*, **87**, pp. 8598–8604.

W. F. Murphy III (1982), Effects of partial water saturation on attenuation in Massilon sandstone and Vycor porous glass, *J. Acoust. Soc. Am.*, **71**, pp. 1458–1468.

W. F. Murphy III (1984), Acoustic measures of partial gas saturation in tight sandstones, *J. Geophys. Res*, **89**, pp. 11549–11559

P. B. Nagy, L. Adler, and B. P. Bonner (1990), Slow wave propagation in air-filled porous materials and natural rocks, *Appl. Phys. Lett.*, **56**, pp. 2504–2506

A. N. Norris (1985), Radiation from a point source and scattering theory in a fluid saturated porous solid, *J. Acoust. Soc. Am.*, **77**, pp. 2012–2023.

A. N. Norris (1986), On the viscodynamic operator in Biot's equations of poroelasticity, *J. Wave-Material Interaction*, **1**, pp. 365–380.

A. N. Norris (1989), Stoneley-wave attenuation and dispersion in permeable formations, *Geophysics*, **54**, pp. 330–341.

P. R. Ogushwitz (1985), Applicability of the Biot theory. I. Low-porosity materials; II. Suspensions; III. Wave speeds versus depth in marine sediments, *J. Acoust. Soc. Am.*, **77**, pp. 429–464.

T. J. Plona (1980), Observation of a second bulk compressional wave in a porous medium at ultrasonic frequencies, *Appl. Phys. Lett.*, **36**, pp. 259–261.

J. M. Sabatier, H. E. Bass, L. N. Bolen, K. Attenborough, and V. V. S. S. Sastry (1986), The interaction of airborne sound with the porous ground: The theoretical formulation, *J. Acoust. Soc. Am.*, **79**, pp. 1345–1352.

D. Salin and W. Schön (1981), Acoustics of water saturated packed glass spheres, *J. Phys. Lett.*, **42**, pp. 477–480.

J. E. Santos, J. M. Corberó, and J. Douglas, Jr. (1990), Static and dynamic behavior of a porous solid saturated by a two-phase fluid, *J. Acoust. Soc. Am.*, **87**, pp. 1428–1438.

J. E. Santos, J. Douglas, Jr., J. Corberó, and O. M Lovera (1990), A model for wave propagation in a porous medium saturated by a two-phase fluid, *J. Acoust. Soc. Am.*, **87**, pp. 1439–1448.

J. F. Schatz (1976), Models of inelastic volume deformation of porous geologic materials, in *The Effects of Voids on Material Deformation*, AMD – Vol. 16, edited by S. C. Cowin and M. M. Carroll, American Society of Mechanical Engineers, New York, pp. 141–170.

P. Sheng and M.-Y. Zhou (1988), Dynamic permeability in porous media, *Phys. Rev. Lett.*, **61**, pp. 1591–1594.

G. Simmons, R. Wilkens, L. Caruso, T. Wissler, and F. Miller (1982), Physical properties and microstructures of a set of sandstones, *Annual Report to the Schlumberger-Doll Research Center, 1 January 1982*, pp. VI–16.

G. Simmons, R. Wilkens, L. Caruso, T. Wissler, and F. Miller (1983), Physical properties and microstructures of a set of sandstones, *Annual Report to the Schlumberger-Doll Research Center, 1 January 1983*, pp. VI–16.

R. D. Stoll (1977), Acoustic waves in ocean sediments, *Geophysics*, **42**, pp. 715–725.

R. D. Stoll (1989), *Sediment Acoustics*, Lecture Notes in Earth Sciences, Vol. 26, Springer, Berlin, Chapts. 4 and 5.

R. D. Stoll and G. M. Bryan (1970), Wave attenuation in saturated sediments, *J. Acoust. Soc. Am.*, **47**, pp. 1440–1447.

L. Thigpen and J. G. Berryman (1985), Mechanics of porous elastic materials containing multiphase fluid, *Int. J. Eng. Sci.*, **23**, pp. 1203–1214.

J. G. M. van der Grinten, M. E. H. van Dongen, and H. van der Kogel (1985), A shock-tube technique for studying pore-pressure propagation in a dry and water-saturated porous medium, *J. Appl. Phys.*, **58**, pp. 2937–2942.

J. B. Walsh and W. F. Brace (1984), The effect of pressure on porosity and the transport properties of rock, *J. Geophys. Res.*, **89**, pp. 9425–9431.

A. W. Wood (1957), *A Textbook of Sound*, Bell, London, p. 360.

M.-Y. Zhou and P. Sheng (1989), First-principles calculations of dynamic permeability in porous media, *Phys. Rev. B*, **39**, pp. 12027–12039.

C. Zwikker and C. W. Kosten (1949), *Sound Absorbing Materials*, Elsevier, Amsterdam.

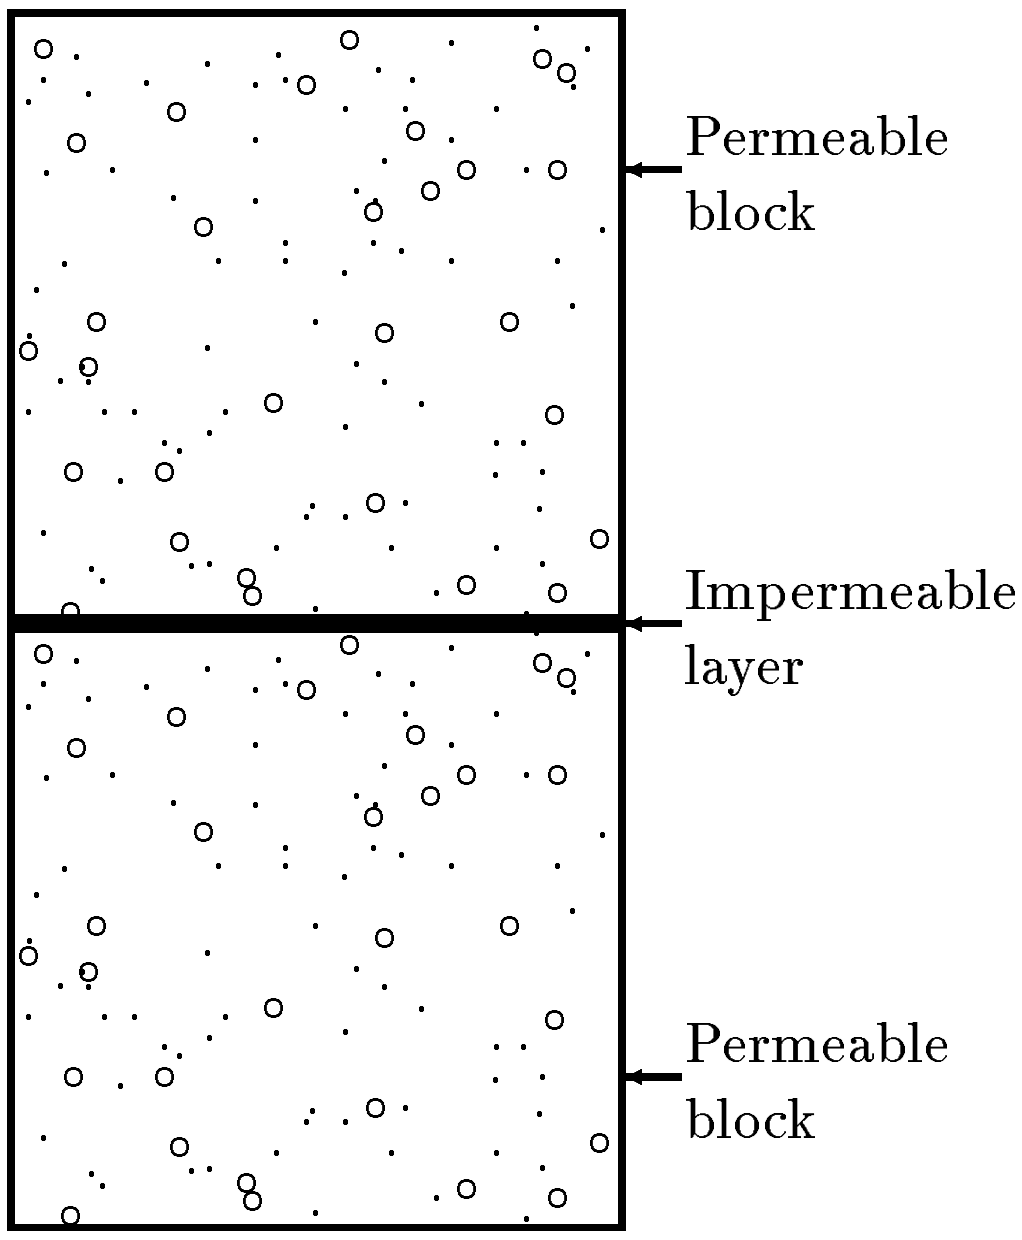


Figure 2: A simple experiment to prove that the attenuation of the fast wave depends on the local – not the global – value of permeability $\kappa$. A fast wave incident normal to the impermeable partitions will experience a small but finite attenuation even though the global permeability in this direction vanishes identically.